




Self-Tapping Screws

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

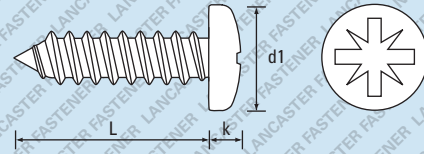

Also available in A2 Stainless Steel - See page 159

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|---------------------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | 115,000 1,000 0.16 | 50,000 1,000 0.33 | | | | | | | 3/16 |
| 6.5 | 86,000 1,000 0.20 | 45,000 1,000 0.39 | 28,000 1,000 0.66 | 19,000 1,000 0.92 | 16,000 1,000 1.14 | | | | 1/4 |
| 8 | 80,000 1,000 0.24 | 40,000 1,000 0.46 | 24,000 1,000 0.75 | | 15,000 1,000 1.20 | | | | 5/16 |
| 9.5 | 70,000 1,000 0.26 | 30,000 1,000 0.50 | 24,000 1,000 0.83 | 18,000 1,000 1.05 | 14,000 1,000 1.28 | 10,000 1,000 1.78 | | | 3/8 |
| 13 | 55,000 1,000 0.33 | 28,000 1,000 0.61 | 18,000 1,000 1.00 | 15,000 1,000 1.27 | 13,000 1,000 1.53 | 7,500 1,000 2.11 | 7,000 1,000 3.03 | 4,500 500 4.82 | 1/2 |
| 16 | 35,000 1,000 0.39 | 25,000 1,000 0.72 | 15,000 1,000 1.17 | 13,000 1,000 1.46 | 11,000 1,000 1.78 | 7,000 1,000 2.43 | 6,000 1,000 3.47 | 3,500 500 5.41 | 5/8 |
| 19 | | 20,000 1,000 0.84 | 13,000 1,000 1.35 | 12,000 1,000 1.65 | 10,000 1,000 2.04 | 7,000 1,000 2.76 | 4,500 500 3.91 | 3,500 500 5.99 | 3/4 |
| 22 | | 20,000 1,000 0.95 | 13,000 1,000 1.51 | | 9,000 1,000 2.29 | 6,500 1,000 3.08 | | | 7/8 |
| 25 | | 15,000 1,000 1.06 | 10,000 1,000 1.68 | 9,500 1,000 2.03 | 8,000 1,000 2.55 | 5,000 500 3.41 | 4,000 500 4.79 | 3,000 500 7.16 | 1 |
| 32 | | 10,000 1,000 1.28 | 8,000 1,000 2.02 | 7,500 500 2.38 | 6,000 500 3.05 | 4,500 500 4.06 | 3,500 500 5.67 | 2,500 250 8.33 | 1 1/4 |
| 38 | | 7,000 500 1.52 | 7,000 1,000 2.36 | 5,000 500 2.73 | 5,000 500 3.56 | 3,000 500 4.71 | 3,000 500 6.55 | 2,000 250 9.50 | 1 1/2 |
| 45 | | | 4,500 500 2.70 | | 3,500 500 4.07 | 3,000 250 5.36 | 2,500 250 7.43 | 1,700 250 10.66 | 1 3/4 |
| 50 | | | 3,000 500 3.04 | | 2,500 500 4.58 | 2,000 250 6.01 | 2,000 250 8.31 | 1,200 250 11.82 | 2 |
| 57 | | | | | 2,500 250 4.65 | 2,000 250 6.08 | | 1,000 200 12.10 | 2 1/4 |
| 63 | | | | | 2,300 250 4.93 | 1,500 250 6.65 | 1,500 200 9.05 | 1,000 200 12.60 | 2 1/2 |
| 70 | | | | | 2,000 250 5.50 | 1,000 250 7.40 | | | 2 3/4 |
| 75 | | | | | | 1,000 200 8.61 | 1,000 200 11.83 | 750 200 14.60 | 3 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABZPAN42130ZC
LTABZPAN55250ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
5.5 x 25.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)


**CASTLE®**

Low priced, bulk packed, commodity size ranges

DIN 7981**Cross Recess (Z) Pan****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

Self-Tapping Screws

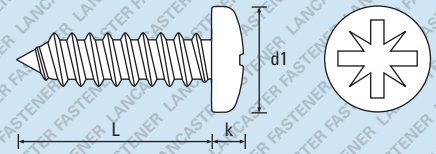

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|---------------------|------|------|---------------------|---------------------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 30,000 N/A 0.50 | 24,000 N/A 0.83 | | | 14,000 N/A 1.28 | 10,000 N/A 1.78 | | | 3/8 |
| 13 | 28,000 N/A 0.61 | 18,000 N/A 1.00 | | | 13,000 N/A 1.53 | 7,500 N/A 2.11 | | | 1/2 |
| 16 | 25,000 N/A 0.72 | 15,000 N/A 1.17 | | | 11,000 N/A 1.78 | 7,000 N/A 2.43 | | | 5/8 |
| 19 | 20,000 N/A 0.84 | 13,000 N/A 1.35 | | | 10,000 N/A 2.04 | 7,000 N/A 2.76 | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | 15,000 N/A 1.06 | 10,000 N/A 1.68 | | | 8,000 N/A 2.55 | 5,000 N/A 3.41 | | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

 Zinc Plated (CR3) - preferred and available from stock.
PRODUCT CODE EXAMPLE

STABZPAN35190ZC

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)


CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

Cross Recess (Z) Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

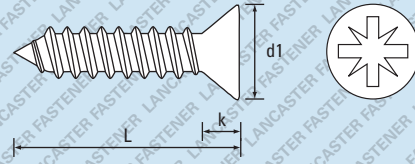

Also available in A2 Stainless Steel - See page 160

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|------------|------|------|------|------|------|------|-------|-------|------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |

| L- Length mm | Bulk Carton Quantity | | | Small Box Quantity | | | Weight (KG) per 1,000 | | | L- Length ins | |
|--------------|----------------------|-------------|--------------|--------------------|-------------|--------------|-----------------------|-------------|--------------|---------------|-------|
| | Qty | Weight (KG) | Weight (LBS) | Qty | Weight (KG) | Weight (LBS) | Qty | Weight (KG) | Weight (LBS) | | |
| 4.5 | 145,000 | 1,000 | 0.10 | | | | | | | 3/16 | |
| 6.5 | 120,000 | 1,000 | 0.14 | 65,000 | 1,000 | 0.29 | 42,000 | 1,000 | 0.47 | 1/4 | |
| 8 | 110,000 | 1,000 | 0.17 | 55,000 | 1,000 | 0.37 | 39,000 | 1,000 | 0.56 | 5/16 | |
| 9.5 | 90,000 | 1,000 | 0.20 | 40,000 | 1,000 | 0.40 | 28,000 | 1,000 | 0.64 | 3/8 | |
| 13 | 75,000 | 1,000 | 0.27 | 35,000 | 1,000 | 0.51 | 22,000 | 1,000 | 0.81 | 1/2 | |
| 16 | 45,000 | 1,000 | 0.33 | 30,000 | 1,000 | 0.63 | 18,000 | 1,000 | 0.98 | 5/8 | |
| 19 | | | | 25,000 | 1,000 | 0.74 | 16,000 | 1,000 | 1.15 | 3/4 | |
| 22 | | | | 20,000 | 1,000 | 0.85 | 13,000 | 1,000 | 1.33 | 7/8 | |
| 25 | | | | 17,000 | 1,000 | 0.96 | 13,000 | 1,000 | 1.50 | 1 | |
| 32 | | | | 15,000 | 1,000 | 1.18 | 10,000 | 1,000 | 1.84 | 1 1/4 | |
| 38 | | | | | 7,500 | 1,000 | 2.18 | 7,500 | 500 | 2.41 | 1 1/2 |
| 45 | | | | | 5,500 | 500 | 2.52 | 4,000 | 500 | 3.79 | 1 3/4 |
| 50 | | | | | 3,500 | 500 | 2.86 | 5,000 | 500 | 3.18 | 2 |
| 57 | | | | | | | | 2,700 | 250 | 4.30 | 2 1/4 |
| 63 | | | | | | | | 2,300 | 250 | 4.63 | 2 1/2 |
| 70 | | | | | | | | 1,500 | 250 | 4.88 | 2 3/4 |
| 75 | | | | | | | | 1,500 | 200 | 8.17 | 3 |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).
 Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

| PRODUCT CODE EXAMPLE | PRODUCT DESCRIPTION EXAMPLE |
|----------------------|--|
| LTABZCSK48160ZC | 4.8 x 16.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3) |
| LTABZCSK29130ZN | 2.9 x 13.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3) |


**CASTLE®**

Low priced, bulk packed, commodity size ranges

DIN 7982**Cross Recess (Z) Countersunk****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

Self-Tapping Screws

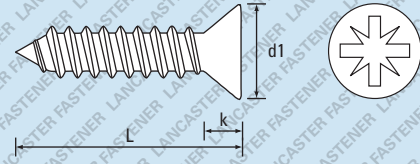

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|---------------------|------|---------------------|------|---------------------|--------------------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | | 40,000 N/A 0.40 | | 28,000 N/A 0.64 | | | | | 3/8 |
| 13 | | 35,000 N/A 0.51 | | 22,000 N/A 0.81 | | 16,000 N/A 1.25 | | | 1/2 |
| 16 | | 30,000 N/A 0.63 | | 18,000 N/A 0.98 | | 12,000 N/A 1.50 | 9,000 N/A 1.99 | | 5/8 |
| 19 | | 25,000 N/A 0.74 | | 16,000 N/A 1.15 | | 12,000 N/A 1.65 | 8,000 N/A 2.31 | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | 13,000 N/A 1.50 | | 9,000 N/A 2.26 | 6,000 N/A 2.97 | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

 Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

STABZCSK42250ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.


© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

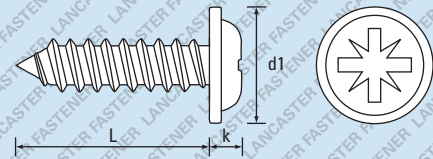

Also available in A2 Stainless Steel - See page 161

Further technical data is available on pages 234 - 236

TYPE C pointed

| Di. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Di. mm |
|--------------------|---|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|--------------------|--------------------|---------------------|
| Di. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Di. Gauge |
| d1 - max | - | 6.53 | 8.15 | 8.90 | 9.75 | 11.38 | 13.00 | 14.55 | d1 - max |
| k - max | - | 1.60 | 1.88 | 2.00 | 2.36 | 2.90 | 3.15 | 3.68 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | 48,000 1,000 0.39 | 31,000 1,000 0.66 | | | 19,000 1,000 1.02 | | | 1/4 | |
| 8 | 40,000 1,000 0.48 | 28,000 1,000 0.75 | | | 17,000 1,000 1.11 | | | 5/16 | |
| 9.5 | 35,000 1,000 0.50 | 26,000 1,000 0.83 | 19,500 1,000 0.92 | 15,000 1,000 1.28 | 10,000 1,000 1.78 | | | 3/8 | |
| 13 | 30,000 1,000 0.61 | 20,000 1,000 1.00 | 15,500 1,000 1.21 | 12,000 1,000 1.53 | 9,000 1,000 2.11 | 6,000 1,000 3.03 | 1/2 | | |
| 16 | 25,000 1,000 0.72 | 15,000 1,000 1.17 | 13,500 1,000 1.28 | 11,000 1,000 1.68 | 7,000 1,000 2.43 | 5,500 500 3.47 | 5/8 | | |
| 19 | 21,000 1,000 0.84 | 13,000 1,000 1.35 | 10,500 1,000 1.45 | 11,000 1,000 1.79 | 6,000 1,000 2.76 | 5,000 500 3.91 | 3/4 | | |
| 22 | | | | | | | | | 7/8 |
| 25 | | | 10,000 1,000 1.68 | | | 7,000 1,000 2.55 | 5,000 500 3.41 | 4,500 500 4.79 | 1 |
| 32 | | | 8,000 1,000 2.02 | | | 5,000 500 3.05 | 3,500 500 4.06 | 3,500 500 5.67 | 1 1/4 |
| 38 | | | 6,000 1,000 2.36 | | | 4,000 500 3.56 | 3,500 500 4.71 | 1 1/2 | |
| 45 | | | | | 3,500 500 4.07 | 2,500 250 5.36 | 1 3/4 | | |
| 50 | | | | | 2,500 500 4.58 | 2,500 250 6.01 | 2 | | |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABZFLN55320ZC
LTABZFLN42160ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 32.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 16.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Black (CR3)

**CASTLE®**


Low priced, bulk packed, commodity size ranges

BS 4174**Cross Recess (Z) Flange**

Steel / Zinc Plated (CR3)

RoHS 2 Compliant

Self-Tapping Screws

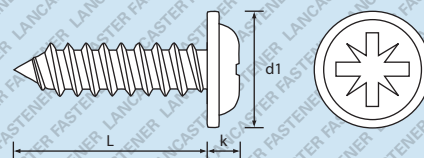

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|---------------------|------|------|---------------------|---------------------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | 6.53 | 8.15 | 8.90 | 9.75 | 11.38 | 13.00 | 14.55 | d1 - max |
| k - max | - | 1.60 | 1.88 | 2.00 | 2.36 | 2.90 | 3.15 | 3.68 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 35,000 N/A 0.50 | 26,000 N/A 0.83 | | | 15,000 N/A 1.28 | 10,000 N/A 1.78 | | | 3/8 |
| 13 | 30,000 N/A 0.61 | 20,000 N/A 1.00 | | | 12,000 N/A 1.53 | 9,000 N/A 2.11 | | | 1/2 |
| 16 | 25,000 N/A 0.72 | 15,000 N/A 1.17 | | | 11,000 N/A 1.78 | 7,000 N/A 2.43 | | | 5/8 |
| 19 | 21,000 N/A 0.84 | 13,000 N/A 1.35 | | | 11,000 N/A 2.04 | 6,000 N/A 2.76 | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | 10,000 N/A 1.68 | | | | 7,000 N/A 2.55 | 5,000 N/A 3.41 | | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

 Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

STABZFLN42250ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3)


CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

Cross Recess (H) Pan
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

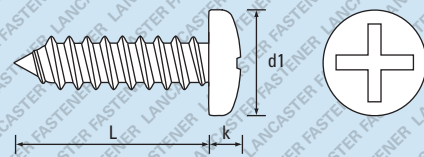

Further technical data is available on pages 234 - 236

| TYPE C pointed | | | | | | | | | | |
|----------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|---------------------|------------|---------------|
| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm | |
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge | |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max | |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max | |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F | |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess | |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | | L- Length ins |
| 4.5 | 115,000 1,000 0.21 | | | | | | | | | 3/16 |
| 6.5 | 86,000 1,000 0.23 | 45,000 1,000 0.44 | 28,000 1,000 0.70 | 19,000 1,000 0.92 | 16,000 1,000 1.09 | | | | | 1/4 |
| 8 | | | | | | | | | | 5/16 |
| 9.5 | 70,000 1,000 0.30 | 30,000 1,000 0.50 | 24,000 1,000 0.83 | 18,000 1,000 1.05 | 14,000 1,000 1.28 | 10,000 1,000 1.78 | | | | 3/8 |
| 13 | 55,000 1,000 0.36 | 28,000 1,000 0.61 | 18,000 1,000 1.00 | 15,000 1,000 1.27 | 13,000 1,000 1.53 | 7,500 1,000 2.11 | 7,000 1,000 3.03 | 4,500 500 4.82 | | 1/2 |
| 16 | 35,000 1,000 0.40 | 25,000 1,000 0.72 | 15,000 1,000 1.17 | 13,000 1,000 1.44 | 11,000 1,000 1.72 | 7,000 1,000 2.43 | 6,000 1,000 3.47 | 3,500 500 5.41 | | 5/8 |
| 19 | | 20,000 1,000 0.84 | 13,000 1,000 1.35 | 12,000 1,000 1.65 | 10,000 1,000 2.04 | 7,000 1,000 2.76 | 4,500 500 3.91 | 3,500 500 5.99 | | 3/4 |
| 22 | | 20,000 1,000 0.95 | 13,000 1,000 1.51 | 11,000 1,000 1.84 | 9,000 1,000 2.29 | 6,500 1,000 3.08 | 4,000 500 4.35 | 3,000 500 6.53 | | 7/8 |
| 25 | | 15,000 1,000 1.06 | 10,000 1,000 1.68 | 9,500 1,000 2.03 | 8,000 1,000 2.55 | 5,000 1,000 3.41 | 4,000 500 4.85 | 3,000 500 7.16 | | 1 |
| 32 | | 10,000 1,000 1.28 | 8,000 1,000 2.02 | 7,500 1,000 2.30 | 6,000 500 3.05 | 4,500 500 4.06 | 3,500 500 5.67 | 2,500 250 8.33 | | 1 1/4 |
| 38 | | 7,000 1,000 1.42 | 7,000 1,000 2.36 | 5,000 1,000 2.65 | 5,000 500 3.56 | 3,000 500 4.71 | 3,000 500 6.55 | 2,000 250 9.50 | | 1 1/2 |
| 45 | | | 3,000 500 3.01 | 3,500 500 4.07 | 3,000 500 5.36 | 2,500 250 7.43 | 1,700 250 10.66 | | | 1 3/4 |
| 50 | | | 3,000 500 3.04 | 2,500 500 4.52 | 2,000 250 6.01 | 2,000 250 8.31 | 1,200 250 11.82 | | | 2 |
| 57 | | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | 1,000 200 12.60 | | 2 1/2 |
| 70 | | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | | 3 |
| 80 | | | | | | | | | | 3 1/4 |

Zinc Plated (CR3) - preferred and available from stock.
 Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.
 See page 267 for further detail.

| PRODUCT CODE EXAMPLE | PRODUCT DESCRIPTION EXAMPLE |
|----------------------|--|
| LTABHPAN35130ZC | 3.5 x 13.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3) |
| LTABHPAN42190ZN | 4.2 x 19.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3) |

Carbon Steel Product Ranges
 Stainless Steel Product Ranges
 Brass Product Ranges
 Technical Data


**CASTLE®**

Low priced, bulk packed, commodity size ranges

DIN 7981**Cross Recess (H) Pan****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

Self-Tapping Screws

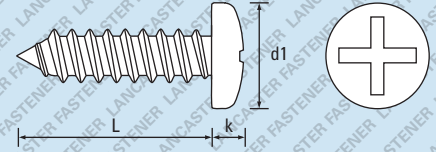

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|---------------------|---------------------|---------------------|---------------------|------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 30,000 N/A 0.50 | 24,000 N/A 0.83 | 18,000 N/A 1.05 | 14,000 N/A 1.28 | 10,000 N/A 1.78 | | | | 3/8 |
| 13 | 28,000 N/A 0.61 | 18,000 N/A 1.00 | 15,000 N/A 1.27 | 13,000 N/A 1.53 | 7,500 N/A 2.11 | | | | 1/2 |
| 16 | 25,000 N/A 0.72 | 15,000 N/A 1.17 | 13,000 N/A 1.46 | 11,000 N/A 1.72 | 7,000 N/A 2.43 | | | | 5/8 |
| 19 | 20,000 N/A 0.84 | 13,000 N/A 1.35 | 12,000 N/A 1.65 | 10,000 N/A 2.04 | 7,000 N/A 2.76 | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | 10,000 N/A 1.68 | | 9,500 N/A 2.03 | 8,000 N/A 2.55 | 5,000 N/A 3.41 | | | | 1 |
| 32 | 8,000 N/A 2.02 | | 7,500 N/A 2.38 | 6,000 N/A 3.05 | 4,500 N/A 4.06 | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |
| 80 | | | | | | | | | 3 1/4 |

 Zinc Plated (CR3) - preferred and available from stock.
PRODUCT CODE EXAMPLE

STABHPAN35130ZC

PRODUCT DESCRIPTION EXAMPLE

3.5 x 13.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.


© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

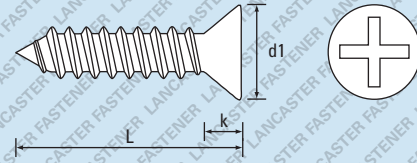

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm | |
|--------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------|---------------|--|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge | |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max | |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref | |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F | |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess | |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins | |
| 4.5 | | | | | | | | | 3/16 | |
| 6.5 | 120,000 1,000 0.18 | 65,000 1,000 0.31 | | | | | | | 1/4 | |
| 8 | | | | | | | | | 5/16 | |
| 9.5 | 90,000 1,000 0.23 | 40,000 1,000 0.40 | 28,000 1,000 0.61 | 25,000 1,000 0.66 | 17,000 1,000 0.99 | | | 3/8 | | |
| 13 | 75,000 1,000 0.27 | 35,000 1,000 0.51 | 22,000 1,000 0.81 | 21,000 1,000 0.88 | 16,000 1,000 1.25 | 11,000 1,000 1.67 | 10,000 1,000 2.30 | 1/2 | | |
| 16 | 30,000 1,000 0.63 | | 18,000 1,000 0.98 | 18,000 1,000 1.07 | 12,000 1,000 1.50 | 9,000 1,000 1.99 | 8,000 1,000 2.74 | 5/8 | | |
| 19 | 25,000 1,000 0.74 | 16,000 1,000 1.15 | 16,000 1,000 1.34 | 12,000 1,000 1.76 | 8,000 1,000 2.31 | 6,000 1,000 3.18 | 4,500 500 4.35 | 3/4 | | |
| 22 | | | 13,000 1,000 1.33 | 12,000 1,000 1.45 | 11,000 1,000 2.01 | 7,000 1,000 2.64 | | | 7/8 | |
| 25 | 19,000 1,000 0.96 | 13,000 1,000 1.50 | 10,000 1,000 1.64 | 9,000 1,000 2.26 | 6,000 1,000 2.97 | 5,000 500 4.06 | 3,800 500 5.52 | 1 | | |
| 32 | | | 10,000 1,000 1.84 | 8,000 1,000 2.10 | 5,000 1,000 2.77 | 5,500 500 3.62 | 4,000 500 4.94 | 3,000 250 6.69 | 1 1/4 | |
| 38 | | | 7,500 1,000 2.41 | | 4,000 500 3.28 | 4,000 500 4.27 | 3,300 500 5.82 | 3,000 250 7.85 | 1 1/2 | |
| 45 | | | | | 3,000 500 4.92 | | 2,000 250 6.70 | 1 3/4 | | |
| 50 | | | | | 3,000 500 4.30 | 2,500 250 5.57 | 2,000 250 7.58 | 1,500 250 10.21 | 2 | |
| 57 | | | | | | | | | 2 1/4 | |
| 63 | | | | | | | 2,000 250 6.07 | 2 1/2 | | |
| 70 | | | | | | | 1,200 250 6.45 | 2 3/4 | | |
| 75 | | | | | | | | | 3 | |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABHCSK42160ZC
 LTABHCSK35095ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 9.5 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)


**CASTLE®**

Low priced, bulk packed, commodity size ranges

DIN 7982**Cross Recess (H) Countersunk****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

Self-Tapping Screws

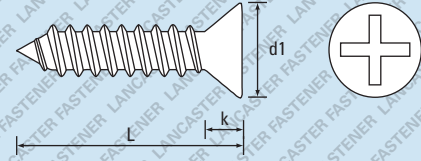

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|---------------------|---------------------|---------------------|---------------------|------|-------|--------------------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 40,000 N/A 0.40 | 28,000 N/A 0.61 | | | | | | | 3/8 |
| 13 | 35,000 N/A 0.51 | 22,000 N/A 0.81 | 21,000 N/A 0.88 | 16,000 N/A 1.25 | 11,000 N/A 1.67 | | | | 1/2 |
| 16 | 30,000 N/A 0.63 | 18,000 N/A 0.98 | 18,000 N/A 1.07 | 12,000 N/A 1.50 | 9,000 N/A 1.99 | | | | 5/8 |
| 19 | 25,000 N/A 0.74 | 16,000 N/A 1.15 | 16,000 N/A 1.26 | 12,000 N/A 1.76 | 8,000 N/A 2.31 | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | 13,000 N/A 1.50 | | 10,000 N/A 1.64 | 9,000 N/A 2.26 | 6,000 N/A 2.97 | | | | 1 |
| 32 | 10,000 N/A 1.84 | | | | | | | 5,500 N/A 3.62 | 1 1/4 |
| 38 | | | | | | | | 4,000 N/A 4.27 | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

STABHCSK42160ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.




Self-Tapping Screws

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

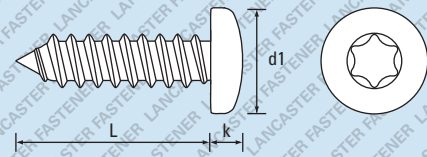

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm | |
|--------------|---|-----------------------|-----------------------|------|-----------------------|------|-----------------------|-------|-----------------------|------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge | |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max | |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max | |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F | |
| Recess | T8 | T10 | T15 | T15 | T20 | T25 | T25 | T30 | Recess | |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins | |
| 4.5 | | | | | | | | | 3/16 | |
| 6.5 | 86,000 1,000 0.23 | 45,000 1,000 0.41 | 28,000 1,000 0.71 | | | | 16,000 1,000 1.12 | | | 1/4 |
| 8 | 40,000 1,000 0.49 | | 24,000 1,000 0.75 | | | | | | | 5/16 |
| 9.5 | 30,000 1,000 0.50 | | 24,000 1,000 0.88 | | 18,000 1,000 1.20 | | 14,000 1,000 1.33 | | 10,000 1,000 1.98 | |
| 13 | 28,000 1,000 0.62 | | 18,000 1,000 1.00 | | 15,000 1,000 1.35 | | 13,000 1,000 1.53 | | 7,500 1,000 2.20 | |
| 16 | 25,000 1,000 0.78 | | 15,000 1,000 1.20 | | 13,000 1,000 1.55 | | 11,000 1,000 1.70 | | 7,000 1,000 2.40 | |
| 19 | 20,000 1,000 0.85 | | 13,000 1,000 1.30 | | 12,000 1,000 1.75 | | 10,000 1,000 1.88 | | 7,000 1,000 2.76 | |
| 22 | | | 13,000 1,000 1.46 | | 11,000 1,000 1.95 | | 9,000 1,000 2.20 | | 6,500 1,000 3.03 | |
| 25 | 15,000 1,000 1.07 | | 10,000 1,000 1.60 | | 9,500 1,000 2.16 | | 8,000 1,000 2.40 | | 5,000 500 3.30 | |
| 32 | 10,000 1,000 1.31 | | 8,000 1,000 1.88 | | 7,500 1,000 2.58 | | 6,000 500 2.80 | | 4,500 500 4.00 | |
| 38 | | | 7,000 1,000 2.27 | | 5,000 500 2.84 | | 5,000 500 3.20 | | 3,000 500 4.20 | |
| 45 | | | | | | | 3,000 250 4.40 | | 1 3/4 | |
| 50 | | | | | | | 2,500 250 4.00 | | 2 | |
| 57 | | | | | | | | | 2 1/4 | |
| 63 | | | | | | | | | 2 1/2 | |
| 70 | | | | | | | | | 2 3/4 | |
| 75 | | | | | | | | | 3 | |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABTXPAN48190ZC
LTABTXPAN35160ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 19.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 16.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)


T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
E. & O. E.
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.



Self-Tapping Screws

T-Drive® (6-Lobe) Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

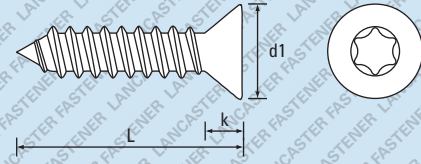

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----------------------|-----------------------|------|-----------------------|-----------------------|-----------------------|--------------------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | - | T8 | T10 | T15 | T20 | T25 | T25 | T30 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 40,000 1,000 0.42 | 28,000 1,000 0.60 | | | 17,000 1,000 0.99 | | | 3/8 | |
| 13 | 35,000 1,000 0.51 | 22,000 1,000 0.80 | 21,000 1,000 0.96 | | | 16,000 1,000 1.09 | 11,000 1,000 1.60 | 1/2 | |
| 16 | 30,000 1,000 0.63 | 18,000 1,000 0.90 | | | 12,000 1,000 1.32 | 9,000 1,000 1.80 | 5/8 | | |
| 19 | 25,000 1,000 0.67 | 16,000 1,000 1.03 | | | 12,000 1,000 1.53 | 8,000 1,000 2.00 | 3/4 | | |
| 22 | | | | | | | | | 7/8 |
| 25 | 13,000 1,000 1.40 | | | | 9,000 1,000 1.97 | 6,000 1,000 2.60 | 1 | | |
| 32 | | | | | 5,000 1,000 2.38 | 5,500 500 3.19 | 3,000 500 6.09 | 1 1/4 | |
| 38 | | | | | 4,000 500 2.80 | 4,000 500 3.78 | 2,500 250 6.93 | 1 1/2 | |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | 1,500 250 8.93 | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABTXCSK48380ZC
LTABTXCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
2.9 x 13.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




Self-Tapping Screws

Cross Recess (Z) Raised Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

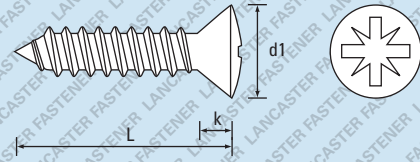

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----------------------|-----------------------|-----------------------|----------------------|----------------------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 40,000 1,000 0.46 | 32,000 1,000 0.76 | | | | | | | 3/8 |
| 13 | 35,000 1,000 0.58 | 20,000 1,000 0.93 | 18,000 1,000 1.11 | 14,000 1,000 1.44 | 9,500 1,000 1.64 | | | 1/2 | |
| 16 | 30,000 1,000 0.69 | 20,000 1,000 1.10 | 15,000 1,000 1.30 | 12,000 1,000 1.69 | 9,000 1,000 2.30 | | | 5/8 | |
| 19 | 27,000 1,000 0.80 | 13,000 1,000 1.27 | 12,000 1,000 1.49 | 10,000 1,000 1.95 | 7,000 1,000 2.62 | 5,000 1,000 3.63 | | 3/4 | |
| 22 | | 13,000 1,000 1.44 | 10,000 1,000 1.63 | 10,000 1,000 2.20 | 7,000 1,000 2.94 | | | 7/8 | |
| 25 | 20,000 1,000 1.03 | 12,000 1,000 1.61 | 10,000 1,000 1.87 | 8,500 1,000 2.45 | 6,300 1,000 3.27 | | | 1 | |
| 32 | | 8,000 1,000 1.95 | 6,500 1,000 2.25 | 7,000 500 2.96 | 5,000 500 3.92 | 4,000 500 5.39 | | 1 1/4 | |
| 38 | | 7,000 1,000 2.30 | | 5,000 500 3.47 | 4,500 500 4.57 | 3,000 500 6.27 | | 1 1/2 | |
| 45 | | | | 5,000 500 3.87 | 3,500 500 5.23 | | | 1 3/4 | |
| 50 | | | | 3,500 500 3.98 | 2,500 250 5.55 | 2,400 250 7.28 | | 2 | |
| 57 | | | | | | | | 2 1/4 | |
| 63 | | | | | | | | 2 1/2 | |
| 70 | | | | | | | | 2 3/4 | |
| 75 | | | | | | | | 3 | |

Zinc Plated (CR3) - preferred and available from stock
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABZRSD55190ZC
LTABZRSD35320ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 19.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 32.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Black (CR3)



LANCASTER

EARTHING NIBS


Cross Recess (Z) Washer Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

Self-Tapping Screws

WITH EARTHING NIBS

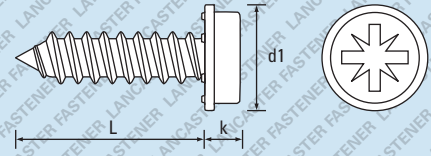

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----|-----------------------|-----|------|-----------------------|-----|-----|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | - | 8.50 | - | 8.50 | - | - | - | d1 - max |
| d2 - ref | - | - | 7.00 | - | 7.00 | - | - | - | d2 - ref |
| k - max | - | - | 2.60 | - | 2.60 | - | - | - | k - max |
| Recess | - | - | 2 | - | 2 | - | - | - | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | | | 18,000 1,000 1.07 | | | 16,000 1,000 1.19 | | | 3/8 |
| 13 | | | 13,000 1,000 1.25 | | | 14,000 1,000 1.39 | | | 1/2 |
| 16 | | | | | | | | | 5/8 |
| 19 | | | | | | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | | | | | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

ENABZWP42130ZC
ENABZWP35095ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 9.5 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data




Self-Tapping Screws

Slotted Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

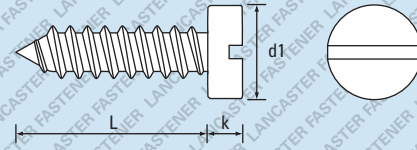

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm | | | |
|---------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|----------------------|-----|-------|-------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge | | | |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max | | | |
| k - max | 1.35 | 1.75 | 2.10 | 2.25 | 2.45 | 2.80 | 3.20 | 3.65 | k - max | | | |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F | | | |
| Recess | - | - | - | - | - | - | - | - | Recess | | | |
| L - Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L - Length ins | | | |
| 4.5 | | | | | | | | | 3/16 | | | |
| 6.5 | 86,000 1,000 0.21 | 45,000 1,000 0.38 | 28,000 1,000 0.62 | | | | | | | 1/4 | | |
| 8 | | | | | | | | | 5/16 | | | |
| 9.5 | 70,000 1,000 0.27 | 30,000 1,000 0.49 | 24,000 1,000 0.74 | 18,000 1,000 0.98 | 14,000 1,000 1.19 | 10,000 1,000 1.77 | | | 3/8 | | | |
| 13 | 28,000 1,000 0.58 | 18,000 1,000 0.93 | | | | | 13,000 1,000 1.36 | 7,500 1,000 1.94 | 7,000 1,000 2.79 | 1/2 | | |
| 16 | 25,000 1,000 0.67 | 15,000 1,000 1.09 | 13,000 1,000 1.39 | 11,000 1,000 1.61 | 7,000 1,000 2.32 | 6,000 1,000 3.12 | 3,500 500 4.19 | | | 5/8 | | |
| 19 | 20,000 1,000 0.78 | 13,000 1,000 1.22 | 12,000 1,000 1.54 | 10,000 1,000 1.92 | 7,000 1,000 2.52 | 4,500 1,000 3.50 | 3,500 500 4.85 | | | 3/4 | | |
| 22 | | | | | | | | | 7/8 | | | |
| 25 | 15,000 1,000 0.94 | 10,000 1,000 1.53 | 9,500 1,000 1.83 | 8,000 1,000 2.17 | 5,000 500 3.04 | 4,000 500 4.24 | 3,000 500 6.00 | | | 1 | | |
| 32 | | | 8,000 1,000 1.96 | 7,500 1,000 2.25 | 6,000 500 2.64 | 4,500 500 3.67 | 3,500 500 5.13 | 2,500 250 6.87 | | | 1 1/4 | |
| 38 | | | | | 5,000 500 3.12 | | | | 2,000 250 7.80 | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 | | | |
| 50 | | | | | 2,500 500 4.07 | | | | 1,200 250 10.14 | | | 2 |
| 57 | | | | | | | | | 2 1/4 | | | |
| 63 | | | | | | | | | 2 1/2 | | | |
| 70 | | | | | | | | | 2 3/4 | | | |
| 75 | | | | | | | | | 3 | | | |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABSLPAN63500ZC
LTABSLPAN35250ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 50.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 25.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Black (CR3)




Self-Tapping Screws

Slotted Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

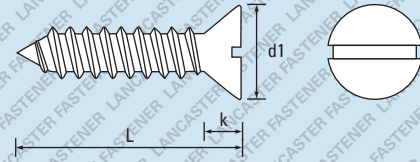

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | - | - | - | - | - | - | - | - | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | 40,000 1,000 0.40 | 28,000 1,000 0.66 | | | | | | | 3/8 |
| 13 | 35,000 1,000 0.54 | 22,000 1,000 0.71 | | | 16,000 1,000 1.17 | | | | 1/2 |
| 16 | 30,000 1,000 0.60 | 18,000 1,000 0.92 | | | | 9,000 1,000 2.00 | | | 5/8 |
| 19 | 25,000 1,000 0.71 | 16,000 1,000 1.13 | 16,000 1,000 1.40 | 12,000 1,000 1.60 | 8,000 1,000 2.24 | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | 17,000 1,000 0.92 | 13,000 1,000 1.36 | | | | 6,000 1,000 2.80 | | | 1 |
| 32 | | 10,000 1,000 1.77 | | | 5,000 1,000 2.47 | | | | 1 1/4 |
| 38 | | 7,500 1,000 2.06 | | | 4,000 500 2.97 | 4,000 500 4.00 | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | 3,000 500 3.68 | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267
 for further detail.

PRODUCT CODE EXAMPLE


LTABSLCSK48380ZC
 LTABSLCSK35190ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 19.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Slotted Raised Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

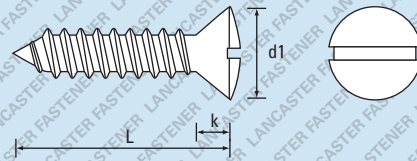

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|---------------|---|-----------------------|------|------|------|------|-----------------------|----------------------|------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | - | - | - | - | - | - | - | - | Recess |
| L - Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | L - Length ins | |
| 4.5 | | | | | | | | 3/16 | |
| 6.5 | | | | | | | | 1/4 | |
| 8 | | | | | | | | 5/16 | |
| 9.5 | 36,000 1,000 0.47 | | | | | | 9,500 1,000 1.83 | 3/8 | |
| 13 | 35,000 1,000 0.60 | 20,000 1,000 0.83 | | | | | 9,500 1,000 1.83 | 1/2 | |
| 16 | 30,000 1,000 0.64 | 20,000 1,000 1.03 | | | | | 12,000 1,000 1.40 | 9,000 1,000 2.14 | 5/8 |
| 19 | 27,000 1,000 0.74 | 13,000 1,000 1.15 | | | | | 10,000 1,000 1.71 | 7,000 1,000 2.40 | 3/4 |
| 22 | | | | | | | | 7/8 | |
| 25 | 20,000 1,000 1.08 | 12,000 1,000 1.40 | | | | | 8,500 1,000 2.22 | 6,300 1,000 3.00 | 1 |
| 32 | | | | | | | | 1 1/4 | |
| 38 | | | | | | | | 1 1/2 | |
| 45 | | | | | | | | 1 3/4 | |
| 50 | | | | | | | | 2 | |
| 57 | | | | | | | | 2 1/4 | |
| 63 | | | | | | | | 2 1/2 | |
| 70 | | | | | | | | 2 3/4 | |
| 75 | | | | | | | | 3 | |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABSLRSD29250ZC
 LTABSLRSD48380ZN

PRODUCT DESCRIPTION EXAMPLE

2.9 x 25.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Zinc Plated (CR3)
 4.8 x 38.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Black (CR3)



LANCASTER


DIN 6928

Washer Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

Self-Tapping Screws

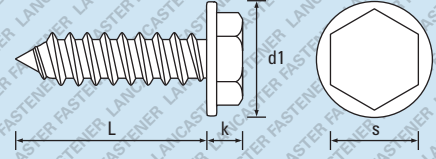

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.5 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----|------|-----------------------|-----------------------|----------------------|----------------------|--------------------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 6 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | - | 8.30 | - | 8.80 | 10.50 | 11.00 | 13.50 | d1 - max |
| k - max | - | - | 3.40 | - | 4.10 | 4.30 | 5.40 | 5.90 | k - max |
| s - A/F max. | - | - | 5.50 | 1/4" | 7.00 | 8.00 | 8.00 | 10.00 | s - A/F max. |
| Recess | - | - | - | - | - | - | - | - | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | | | | 18,000 1,000 1.10 | 11,000 1,000 1.68 | | | | 3/8 |
| 13 | | | | 15,000 1,000 1.19 | 10,000 1,000 1.81 | 7,500 1,000 2.62 | 6,000 1,000 3.35 | 3,800 500 5.05 | 1/2 |
| 16 | | | | | 8,000 1,000 2.20 | 6,500 1,000 2.90 | 5,000 1,000 3.61 | 3,500 500 5.73 | 5/8 |
| 19 | | | | 12,000 1,000 1.40 | 7,000 1,000 2.25 | 6,000 1,000 3.02 | 4,000 500 3.97 | 3,000 500 6.30 | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | | 6,000 1,000 2.81 | 4,000 500 3.86 | 4,000 500 4.66 | 2,600 250 7.50 | 1 |
| 32 | | | | | | | | 2,500 250 8.00 | 1 1/4 |
| 38 | | | | | | | | 1,700 250 9.40 | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABWHX55160ZC
LTABWHX63130ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 16.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Zinc Plated (CR3)
6.3 x 13.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data





Self-Tapping Screws

Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

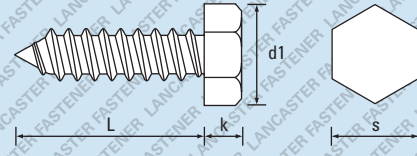

Further technical data is available on pages 234 - 236

TYPE C pointed

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm | | |
|--------------|---|------|-----------------------|------|------|-----------------------|-----------------------|----------------------|---------------------|--------------------|-------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge | | |
| d1 - max | - | - | - | - | - | - | - | - | d1 - max | | |
| k - nom | 1.30 | 1.50 | 2.30 | 2.30 | 2.80 | 3.00 | 4.00 | 4.80 | k - nom | | |
| s - A/F max | 3.20 | 5.00 | 5.50 | 7.00 | 7.00 | 8.00 | 8.00 | 10.00 | s - A/F max | | |
| Recess | - | - | - | - | - | - | - | - | Recess | | |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins | | |
| 4.5 | | | | | | | | | 3/16 | | |
| 6.5 | | | | | | | | | 1/4 | | |
| 8 | | | | | | | | | 5/16 | | |
| 9.5 | | | 16,000 1,000 0.76 | | | 13,000 1,000 1.29 | 12,500 1,000 1.70 | | 3/8 | | |
| 13 | | | 16,000 1,000 0.92 | | | 12,000 1,000 1.54 | 9,000 1,000 2.02 | 6,000 1,000 2.72 | 4,500 500 4.25 | 1/2 | |
| 16 | | | | | | 10,000 1,000 1.76 | 8,000 1,000 2.32 | 5,000 1,000 3.09 | 4,000 500 4.77 | 5/8 | |
| 19 | | | 13,000 1,000 1.23 | | | 8,000 1,000 1.97 | 7,000 1,000 2.61 | 5,000 1,000 3.48 | 3,700 500 5.30 | 3/4 | |
| 22 | | | | | | | | | | 7/8 | |
| 25 | | | | | | 7,000 1,000 2.45 | 6,000 1,000 3.19 | 4,800 500 4.25 | 3,000 500 6.35 | 1 | |
| 32 | | | | | | | | 5,000 500 3.88 | 3,500 500 5.14 | 2,300 250 7.57 | 1 1/4 |
| 38 | | | | | | | | 4,000 500 4.46 | 2,500 500 5.90 | 2,300 250 8.63 | 1 1/2 |
| 45 | | | | | | | | | 2,000 250 9.89 | | 1 3/4 |
| 50 | | | | | | | | 2,000 250 6.96 | 1,700 250 10.36 | | 2 |
| 57 | | | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABHEX63190ZC
LTABHEX35130ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 19.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 13.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Black (CR3)




Self-Tapping Screws

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

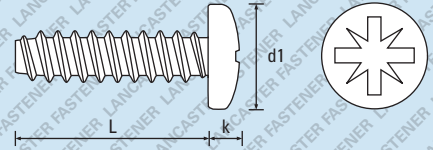

Further technical data is available on pages 234 - 236

TYPE F blunt

| Di. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Di. mm |
|--------------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|--------------------|---------------------|
| Di. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Di. Gauge |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 3.0 | 125,000 1,000 0.17 | | | | | | | | 1/8 |
| 4.5 | 100,000 1,000 0.19 | 54,000 1,000 0.38 | 30,000 1,000 0.62 | | | | | | 3/16 |
| 6.5 | 80,000 1,000 0.23 | 40,000 1,000 0.46 | 28,000 1,000 0.75 | 20,000 1,000 0.94 | 15,000 1,000 1.17 | 10,000 1,000 1.85 | | | 1/4 |
| 8 | 70,000 1,000 0.25 | 40,000 1,000 0.53 | 26,000 1,000 0.81 | | 15,000 1,000 1.31 | 10,000 1,000 1.94 | | | 5/16 |
| 9.5 | 60,000 1,000 0.30 | 32,000 1,000 0.54 | 25,000 1,000 0.88 | 17,000 1,000 1.11 | 13,000 1,000 1.42 | 10,000 1,000 2.06 | | | 3/8 |
| 13 | 55,000 1,000 0.36 | 30,000 1,000 0.60 | 20,000 1,000 1.03 | 14,000 1,000 1.32 | 12,000 1,000 1.61 | 10,000 1,000 2.30 | 6,000 1,000 3.20 | 4,000 500 4.76 | 1/2 |
| 16 | | 25,000 1,000 0.74 | 15,000 1,000 1.20 | 12,000 1,000 1.52 | 11,000 1,000 1.83 | 7,000 1,000 2.50 | 5,500 1,000 3.50 | | 5/8 |
| 19 | | 20,000 1,000 0.83 | 13,000 1,000 1.34 | 10,000 1,000 1.68 | 9,000 1,000 2.01 | 7,000 1,000 2.86 | 5,000 500 3.68 | | 3/4 |
| 22 | | | 10,000 1,000 1.49 | | | 6,000 500 3.12 | | | 7/8 |
| 25 | | 12,000 1,000 1.06 | 10,000 1,000 1.65 | | 7,500 1,000 2.49 | 5,000 500 3.40 | 4,000 500 4.46 | | 1 |
| 32 | | 12,000 1,000 1.28 | 8,000 1,000 1.95 | | 6,000 500 2.95 | 4,000 500 3.95 | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE


LTBZPAN22095ZC
LTBZPAN42065ZN

PRODUCT DESCRIPTION EXAMPLE

2.2 x 9.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 6.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Cross Recess (Z) Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

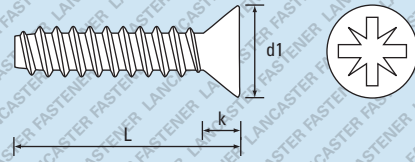

Further technical data is available on pages 234 - 236

| TYPE F blunt | | | | | | | | | |
|--------------|---|------------------------|-----------------------|------|-----------------------|-----------------------|--------------------|---------------------|---------------|
| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 | d1 - max |
| k - ref | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 | k - ref |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| | 4.5 | 150,000 1,000 0.12 | | | | | | | |
| 6.5 | 120,000 1,000 0.15 | 64,000 1,000 0.31 | 38,000 1,000 0.55 | | | | | | 1/4 |
| 8 | 100,000 1,000 0.20 | 45,000 1,000 0.36 | 35,000 1,000 0.57 | | | | | | 5/16 |
| 9.5 | 80,000 1,000 0.21 | 40,000 1,000 0.41 | 30,000 1,000 0.63 | | 16,000 1,000 1.00 | | | | 3/8 |
| 13 | 72,000 1,000 0.27 | 38,000 1,000 0.55 | 24,000 1,000 0.76 | | 16,000 1,000 1.20 | 11,000 1,000 1.73 | | | 1/2 |
| 16 | | 30,000 1,000 0.64 | 22,000 1,000 0.94 | | 11,000 1,000 1.41 | 9,000 1,000 2.03 | | | 5/8 |
| 19 | | | 18,000 1,000 1.15 | | 10,000 1,000 1.65 | 8,500 1,000 2.20 | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | 14,000 1,000 1.41 | | 7,000 1,000 2.08 | 6,000 1,000 2.77 | | | 1 |
| 32 | | | | | 6,000 500 2.48 | | | 2,500 500 6.17 | 1 1/4 |
| 38 | | | | | | | | 2,300 250 7.40 | 1 1/2 |
| 45 | | | | | | | 3,000 250 6.11 | 1,800 250 8.40 | 1 3/4 |
| 50 | | | | | | | | 1,500 250 9.11 | 2 |
| 57 | | | | | | | | 1,500 200 10.56 | 2 1/4 |
| 63 | | | | | | | | 1,000 150 11.43 | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTBZCSK35190ZC
 LTBZCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
 2.9 x 13.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Black (CR3)



LANCASTER


BS 4174

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

Self-Tapping Screws

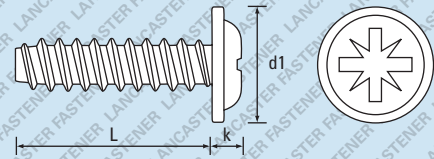

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data

Further technical data is available on pages 234 - 236

| TYPE F blunt | | | | | | | | | |
|--------------|---|-----------------------|-----------------------|------|-----------------------|-----------------------|-----------------------|-------|---------------|
| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | 6.53 | 8.15 | 8.90 | 9.75 | 11.38 | 13.00 | 14.55 | d1 - max |
| k - max | - | 1.60 | 1.88 | 2.00 | 2.36 | 2.90 | 3.15 | 3.68 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | 40,000 1,000 0.39 | 30,000 1,000 0.69 | | | 20,000 1,000 1.05 | | | | 1/4 |
| 8 | | | 28,000 1,000 0.70 | | | 17,000 1,000 1.20 | | | 5/16 |
| 9.5 | 30,000 1,000 0.49 | 22,000 1,000 0.76 | | | | 16,000 1,000 1.30 | 10,000 1,000 1.78 | 3/8 | |
| 13 | | | | | 12,500 1,000 1.55 | 8,500 1,000 2.25 | | | 1/2 |
| 16 | | | | | 11,500 1,000 1.66 | 8,500 1,000 2.29 | | | 5/8 |
| 19 | | | | | 10,000 1,000 1.92 | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | | | | | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.


Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

| PRODUCT CODE EXAMPLE | PRODUCT DESCRIPTION EXAMPLE |
|----------------------|--|
| LTBZFLN42160ZC | 4.2 x 16.0 Cross Recess (Z) Flange Type F BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3) |
| LTBZFLN35080ZN | 3.5 x 8.0 Cross Recess (Z) Flange Type F BS 4174 Self-Tapping Screw Steel / Black (CR3) |

E. & O. E.
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

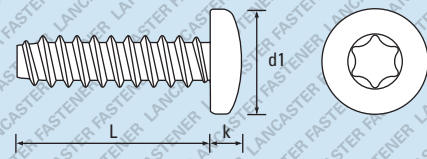T-Drive® (6-Lobe) Pan
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
RoHS 2 Compliant


Further technical data is available on pages 234 - 236

TYPE F blunt

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----------------------|-----------------------|----------------------|----------------------|------|-------|---------------|------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | 4.20 | 5.60 | 6.90 | 7.50 | 8.20 | 9.50 | 10.80 | 12.50 | d1 - max |
| k - max | 1.80 | 2.20 | 2.60 | 2.80 | 3.05 | 3.55 | 3.95 | 4.55 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | T8 | T10 | T15 | T15 | T20 | T25 | T25 | T30 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | L- Length ins | |
| 4.5 | | | | | | | | 3/16 | |
| 6.5 | 40,000 1,000 0.46 | 28,000 1,000 0.78 | 15,000 1,000 1.12 | | | | | 1/4 | |
| 8 | | | | | | | | 5/16 | |
| 9.5 | 32,000 1,000 0.55 | 25,000 1,000 0.91 | 13,000 1,000 1.33 | 8,500 1,000 2.12 | | | | | |
| 13 | 20,000 1,000 1.08 | | 12,000 1,000 1.88 | 7,500 1,000 1.64 | 6,000 1,000 3.19 | | | | |
| 16 | | | 11,000 1,000 2.43 | 7,000 1,000 2.72 | | | | | |
| 19 | | | | | | | | 3/4 | |
| 22 | | | | | | | | 7/8 | |
| 25 | | | | | | | | 1 | |
| 32 | | | | | | | | 1 1/4 | |
| 38 | | | | | | | | 1 1/2 | |
| 45 | | | | | | | | 1 3/4 | |
| 50 | | | | | | | | 2 | |
| 57 | | | | | | | | 2 1/4 | |
| 63 | | | | | | | | 2 1/2 | |
| 70 | | | | | | | | 2 3/4 | |
| 75 | | | | | | | | 3 | |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

 LTBTXPAN55130ZC
 LTBTXPAN48160ZN

PRODUCT DESCRIPTION EXAMPLE

 5.5 x 13.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
 4.8 x 16.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)



T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
 E. & O. E.
 © 2021 Lancaster Fastener Co Ltd. All images are copyright protected.



Self-Tapping Screws

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

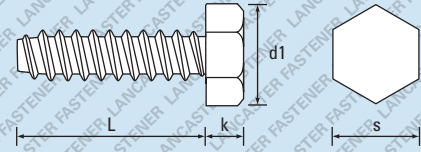

Further technical data is available on pages 234 - 236

TYPE F blunt

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|------|------|------|------|----------------------|----------------------|--------------------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | - | - | - | - | - | - | - | d1 - max |
| k - nom | 1.30 | 1.50 | 2.30 | 2.30 | 2.80 | 3.00 | 4.00 | 4.80 | k - nom |
| s - A/F max | 3.20 | 5.00 | 5.50 | 7.00 | 7.00 | 8.00 | 8.00 | 10.00 | s - A/F max |
| Recess | - | - | - | - | - | - | - | - | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | | | | | | 9,000 1,000 1.87 | | | 3/8 |
| 13 | | | | | | 6,000 1,000 2.02 | 7,000 1,000 2.72 | 4,000 500 4.25 | 1/2 |
| 16 | | | | | | | | 4,000 500 4.77 | 5/8 |
| 19 | | | | | | | 4,000 1,000 3.48 | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | | | | | | 1 |
| 32 | | | | | | | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267
 for further detail.

PRODUCT CODE EXAMPLE

LTBHEX63160ZC
 LTBHEX48130ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 16.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)
 4.8 x 13.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Black (CR3)